
K-SCHL-AUFROLLER STANDARD


Hose reel - standard type

HANSA FLEX

Karakteristike

Materijal crijeva	Polyurethane (PUR)
Radna temperatura	max +40 °C
Primjena	for compressed air and water
Zakretni kut	150°



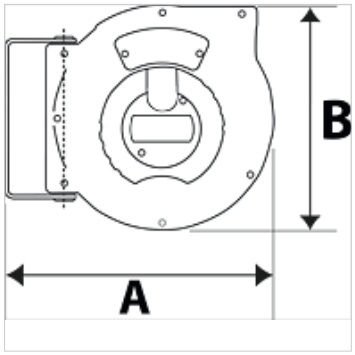

Napomena

Drugi podatci na zahtjev.

Opis

Hose reel with automatic rewind and spring assembly. Robust hose locking mechanism, impact resistant plastic casing. Swivel wall mount made made from coated steel. Easy mounting on the wall or ceiling.

Artikl

Naziv	Dimenzije crijeva	A (mm)	B (mm)	Izlaz navoja	Ulaz navoja	maks. radni tlak (bar)	Duljina crijeva (m)
K- 07 10 11 03	12 mm x 8 mm	325,0	275,0	G 1/4 AG	G 1/4 fem	10	9
K- 07 10 11 04	12 mm x 8 mm	355,0	315,0	G 1/4 AG	G 1/4 fem	15	12

Usprkos pažljivoj provjeri ne mogu se isključiti pogreške i zbog toga ne preuzimamo odgovornost za sadržane podatke.