

TR AB

Nazuvica za zabijanje, DKR

HANSA FLEX

Karakteristike

Priključak 1 BSP navoji matice


Oblik brtve 1 60° vanjski konus

Kratice DKR

Norma ISO 8434-6
BS 5200

Materijal Čelik

Površinska zaštita galvanski premaz

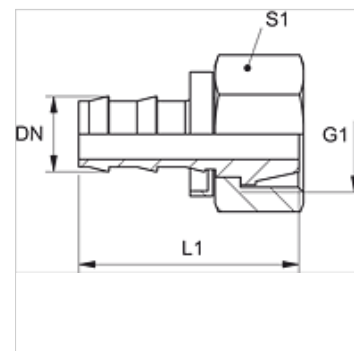

Artikli

| Naziv | DN | Veličina | Col | G1 | L1 (mm) | S1 |
|-------------|----|----------|-------|-------------|------------|----|
| TR 04 AB 06 | 5 | 3 | 3/16" | G 1/4" - 19 | 28 | 17 |
| TR 10 AB | 10 | 6 | 3/8" | G 3/8" - 19 | 34 | 20 |
| TR 10 AB 13 | 10 | 6 | 3/8" | G 1/2" - 14 | - | - |