


# K-FI HANSA PRO

Compressed air filter, with manual/semi-automatic condensate drain,  
HANSA PRO

**HANSA FLEX**

## Karakteristike

Temperatura medija	-10 °C to +50 °C
Okolna temperatura	-10 °C to +50 °C
Mediji	komprimirani zrak
Izvedba	Centrifugal filter
Vrsta pričvršćenja	Line mounting, mounting kit or wall mounting
Ugradbeni položaj	Vertical, drain down
Finoća filtra	5,00 µm
maks. količina kondenzata	49 cc
Nazivni protok G 1/2	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Nazivni protok G 3/8	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Pe maks.	16 bar
Filtarski element	Cellpor
Kućiče	PA66

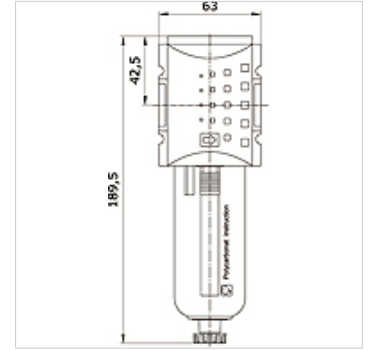

## Artikli

Naziv	Priključak	Spremnik	Veličina	Ispust kondenzata
K- 07 25 21 20	G 3/8 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 21	G 1/2 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 22	G 3/8 i	zinc with visual display	2	manual / semi-automatic
K- 07 25 21 23	G 1/2 i	zinc with visual display	2	manual / semi-automatic