
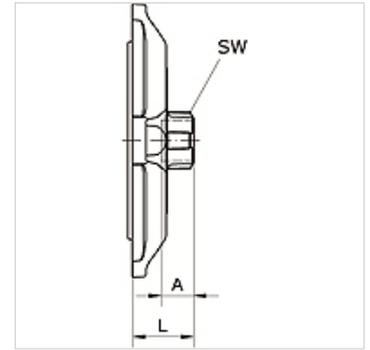


K-RED FLANSCH 80-100 IG INFI

Reducing flange Ø 80 mm/Ø 110 mm with female thread

Karakteristike

| | |
|--------------------------|-------------------------------------|
| Mediji | Compressed air, vacuum, inert gases |
| Radni tlak | -0,99 bar - 15 bar |
| Temperaturno područje | -20 °C to +80 °C |
| Prsten za vođenje | Technopolymer |
| Kućište | Aluminium, treated surface |
| Imbus vijak | Galvanised steel |
| Stezni prsten | Stainless steel 1.4301 |
| Matica | Aluminium, surface treated |
| O prsten | NBR |
| Samoosiguravajuća matica | Galvanised steel |
| Sigurnosni prsteni | Technopolymer |



Artikli

| Naziv | Priključak | za vanjski Ø cijevi | A (mm) | L (mm) | SW (mm) |
|----------------|------------|---------------------|--------|--------|---------|
| K- 07 40 55 23 | G 3/4 | 80 | 14,5 | 42,0 | 42 |
| K- 07 40 55 24 | G 1 | 80 | 17,0 | 42,0 | 49 |
| K- 07 40 55 25 | G 1 1/2 | 80 | 20,0 | 42,0 | 66 |
| K- 07 40 55 26 | G 2 | 80 | 22,0 | 42,0 | 80 |
| K- 07 40 54 73 | G 3/4 | 110 | 14,5 | 48,0 | 42 |
| K- 07 40 54 74 | G 1 | 110 | 17,0 | 48,0 | 49 |
| K- 07 40 54 75 | G 1 1/2 | 110 | 20,0 | 48,0 | 66 |
| K- 07 40 54 76 | G 2 | 110 | 22,0 | 48,0 | 80 |