

K-STECK VB 20-63 INFI

Straight push-in connector Ø 20 mm – Ø 63 mm

HANSA FLEX

Karakteristike

Mediji Compressed air, vacuum, inert gases

Radni tlak -0,99 bar - 15 bar

Temperaturno područje -20 °C to +80 °C

Brtna NBR


Kučište Aluminium

Stezni prsten Stainless steel 1.4301

Matica Aluminium

O prsten NBR

Sigurnosni prsteni Technopolymer

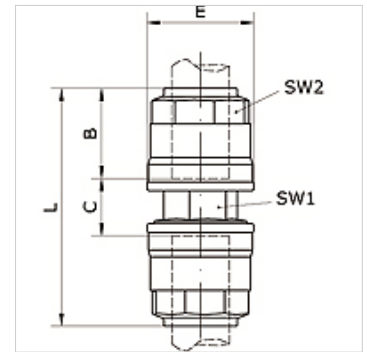

Artikli

| Naziv | Vanjski Ø cijevi | B (mm) | C (mm) | E (mm) | L (mm) | SW1 (mm) | SW2 (mm) |
|----------------|------------------|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 54 97 | 63 mm | 57,5 | 44,0 | 94,0 | 159,0 | 73 | 75 |