

# K-STECK VB 20-63 INFI

Straight push-in connector Ø 20 mm – Ø 63 mm

**HANSA FLEX**

## Karakteristike

**Mediji** Compressed air, vacuum, inert gases

**Radni tlak** -0,99 bar - 15 bar

**Temperaturno područje** -20 °C to +80 °C

**Brtva** NBR


**Kućište** Aluminium

**Stezni prsten** Stainless steel 1.4301

**Matica** Aluminium

**O prsten** NBR

**Sigurnosni prsteni** Technopolymer

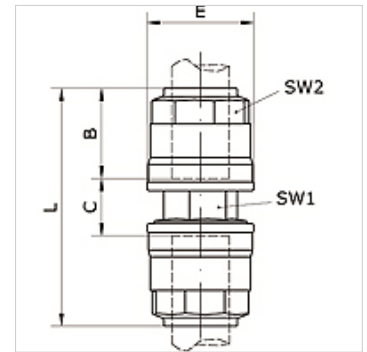

## Artikl

Naziv	Vanjski Ø cijevi	B (mm)	C (mm)	E (mm)	L (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 54 97	63 mm	57,5	44,0	94,0	159,0	73	75