


K-T-RINGSTUECK

T-ring nipples

HANSA FLEX

Karakteristike

| | |
|-------------------|-----------------|
| Radni tlak | Max. 16 bar |
| Radna temperatura | -20 °C to +70°C |
| Materijal | poniklani mjed |
| Pritisni prsten | Hostaform |
| Stezni prsten | Stainless steel |

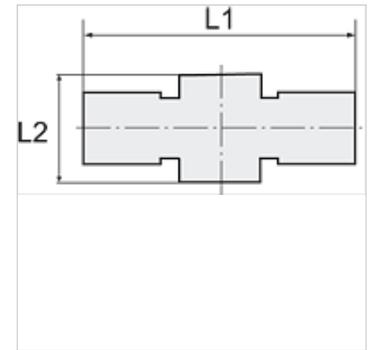

Napomena

Drugi podatci na zahtjev.

Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikl

| Naziv | za šuplji vijak | za vanjski Ø crijeva | L1 (mm) | L2 (mm) |
|----------------|-----------------|----------------------|------------|------------|
| K- 07 40 26 93 | M 5 | 4 mm | 36,0 | 9,0 |
| K- 07 40 26 97 | G 1/8 | 4 mm | 42,0 | 15,0 |
| K- 07 40 26 98 | G 1/8 | 6 mm | 46,0 | 15,0 |
| K- 07 40 26 99 | G 1/8 | 8 mm | 49,0 | 15,0 |
| K- 07 40 26 95 | G 1/4 | 6 mm | 48,0 | 17,0 |
| K- 07 40 26 96 | G 1/4 | 8 mm | 52,0 | 17,0 |
| K- 07 40 26 94 | G 1/4 | 10 mm | 52,0 | 17,0 |
| K- 07 40 27 02 | G 3/8 | 8 mm | 54,0 | 20,0 |
| K- 07 40 27 00 | G 3/8 | 10 mm | 56,0 | 20,0 |
| K- 07 40 27 01 | G 3/8 | 12 mm | 58,0 | 20,0 |