



K-SV 6 4 HOSTA

Bulkhead connectors Hosta

HANSA FLEX

Karakteristike

Radni tlak	Max. 16 bar (at +20 °C)
Radna temperatura	-20 °C to +70 °C
Materijal	poniklani mjed
Pritisni prsten	Hostaform (black nickel-plated for Ø 10, 12)
O prsten	NBR, siliconefree
Stezna klijesta	Stainless steel AISI 316

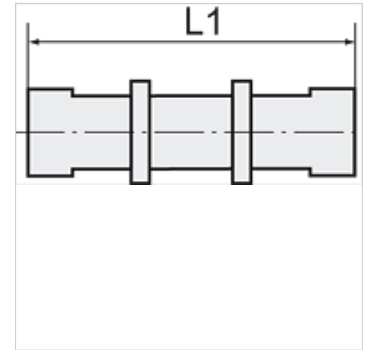

Napomena

Drugi podatci na zahtjev.

Opis

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Artikli

Naziv	Navoj	za vanjski Ø crijeva	L1 (mm)	SW (veličina ključa)
K- 07 40 29 57	M 10 x 1	4 mm	32,0	13 mm
K- 07 40 29 58	M 14 x 1	6 mm	33,5	17 mm
K- 07 40 29 59	M 16 x 1	8 mm	37,0	18 mm
K- 07 40 29 60	M 17 x 1	10 mm	39,5	20 mm
K- 07 40 29 61	M 20 x 1	12 mm	42,0	24 mm