


HK DRH

Nepovratni ventil DRH

Karakteristike

| | |
|-------------------|--|
| Izvedba | Kuglasto blokiranje s mogućnošću deblokiranja - dvostruko |
| Materijal | Kućište: pocinčani čelik Unutarnji dijelovi od čelika |
| Radni tlak | max. 500 bar |

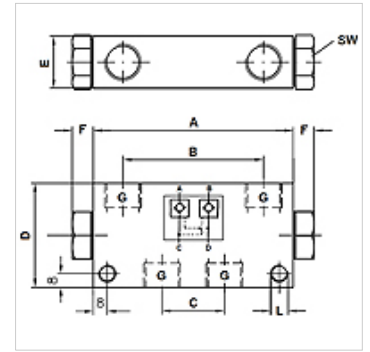

Artikl

| Naziv | p max. (bar) | Odnos uključivanja paljenja | Q max. (L/min) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | G | L (mm) | SW (mm) | Težina (kg) |
|----------|-----------------|-----------------------------|-------------------|-----------|-----------|-----------|-----------|-----------|--------|-----------|------------|----------------|
| HK DRH 1 | 500 | 1:2,5 | 16 | 70 | 50 | 28,0 | 45 | 20 | G 1/4" | 6 | 19 | 0,50 |
| HK DRH 2 | 500 | 1:2,5 | 30 | 89 | 63 | 36,0 | 60 | 30 | G 3/8" | 8 | 22 | 1,20 |
| HK DRH 3 | 500 | 1:2,5 | 60 | 115 | 81 | 36,0 | 60 | 30 | G 1/2" | 10 | 27 | 1,60 |
| HK DRH 4 | 400 | 1:2,5 | 90 | 150 | 106 | 55,0 | 70 | 40 | G 3/4" | 10 | 32 | 2,90 |