


HK PBA

Aksijalna klipna pumpa s kosim osovinama

HANSA FLEX

Karakteristike

| | |
|---------------------------------|--|
| Izvedba | konstantna pumpa brtve Viton priključak za ulje koje curi G 3/8" |
| Navoji na tlačnoj strani | G 3/4" do 63 VFU ccm G 1" od 80 VFU ccm |
| Navoj na usisnoj strani | G 3/4" do 63 VFU ccm G 1" od 80 VFU ccm |
| Opseg isporuke | uklj. usisni nastavak i inspeksijsko crijevo |

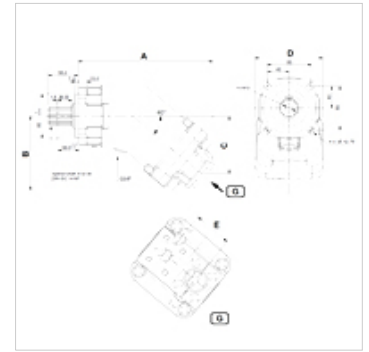

Opis

Fixed displacement pump – hole pattern 80 x 80 – dia. 80 – shaft 8x32x16 ISO 14 – threaded fitting

Suction socket Ø 51.8 mm for HK PBA *** 51SF,

Suction socket Ø 64.5 mm for HK PBA *** 64SF

Changing rotational direction can be done by changing the setting screw and suction socket. Details can be found in the accompanying instructions.

Artikli

| Naziv | VFU | p2 max. | p3 max. | Broj okretaja min. | Broj okretaja max. | A | B | C | D | Smjer okretanja | E | Težina |
|------------------------|------|---------|---------|--------------------|--------------------|------|------|------|------|-----------------|------|--------|
| | (cc) | (bar) | (bar) | (rpm) | (rpm) | (mm) | (mm) | (mm) | (mm) | | (mm) | (kg) |
| HK PBA 005 L 80 51 SF | 5 | 350 | 400 | 500 | 3300 | 195 | 104 | 76 | 108 | ulijevo | 54 | 8,7 |
| HK PBA 012 L 80 51 SF | 12 | 350 | 400 | 500 | 3100 | 195 | 104 | 76 | 108 | ulijevo | 54 | 9,4 |
| HK PBA 018 L 80 51 SF | 18 | 350 | 400 | 500 | 2900 | 195 | 104 | 76 | 108 | ulijevo | 54 | 9,4 |
| HK PBA 025 L 80 51 SF | 25 | 350 | 400 | 500 | 2700 | 195 | 104 | 76 | 108 | ulijevo | 54 | 10,0 |
| HK PBA 032 L 80 51 SF | 32 | 350 | 400 | 500 | 2700 | 202 | 108 | 82 | 108 | ulijevo | 54 | 11,0 |
| HK PBA 040 L 80 51 SF | 40 | 350 | 400 | 500 | 2500 | 202 | 108 | 82 | 108 | ulijevo | 54 | 11,0 |
| HK PBA 050 L 80 51 SF | 50 | 350 | 400 | 500 | 2500 | 215 | 118 | 94 | 108 | ulijevo | 54 | 11,5 |
| HK PBA 056 L 80 51 SF | 56 | 350 | 400 | 500 | 2300 | 215 | 118 | 94 | 108 | ulijevo | 54 | 12,0 |
| HK PBA 063 L 80 51 SF | 63 | 350 | 400 | 500 | 2300 | 215 | 118 | 94 | 108 | ulijevo | 54 | 12,0 |
| HK PBA 080 L 80 51 SF | 80 | 350 | 400 | 500 | 2100 | 242 | 132 | 104 | 122 | ulijevo | 60 | 15,5 |
| HK PBA 080 L 80 64 SF | 80 | 350 | 400 | 500 | 2100 | 242 | 132 | 104 | 122 | ulijevo | 60 | 15,5 |
| HK PBA 108 L 80 51 SF | 108 | 350 | 400 | 500 | 1900 | 242 | 132 | 105 | 122 | ulijevo | 60 | 16,0 |
| HK PBA 108 L 80 64 SF | 108 | 350 | 400 | 500 | 1900 | 242 | 132 | 105 | 122 | ulijevo | 60 | 16,0 |
| HK PBA 130 LR 80 51 SF | 130 | 350 | 400 | 500 | 1750 | 242 | 132 | 105 | 122 | u oba smjera | 60 | 17,0 |
| HK PBA 130 LR 80 64 SF | 130 | 350 | 400 | 500 | 1750 | 242 | 132 | 105 | 122 | u oba smjera | 60 | 17,0 |

p2 = radni tlak – p3 = najveći tlak