

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer



HANSA FLEX

Tulajdonságok

Tulajdonságok Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)
Connection of compressed air and vacuum with push-in coupling
Basic housing with connection facility for a vacuum switch
Maximum suction capacity with minimum compressed air consumption
Minimum size, low weight
Various power ratings for optimised air consumption

Alkalmazás For universal use in handling systems with very high dynamic movements
Handling all kinds of air-tight components
For use in separation systems where space is restricted.
Construction of ejector blocks for centralised or decentralised individual control of suction pads.

Fűvókarendszer	Brass
Csatlakozás	Push-in coupling
Hangcsillapító	Plastic
Alaptest	Impact-resistant plastic

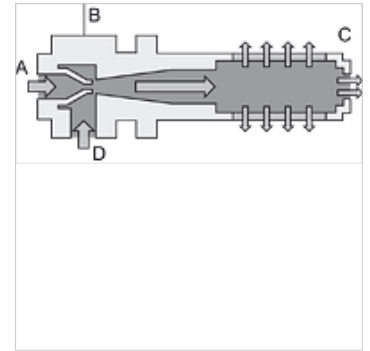

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Cikk

Megnevezés	Fűvóka méret	Szívószelep nyugalmi állás	Sűrített levegő csatlakozó	Vákuum-csatlakozó	Befoglaló méretek
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Tartozék

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit