


# K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

**HANSA FLEX**

## Tulajdonságok

<b>Tulajdonságok</b>	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
----------------------	---

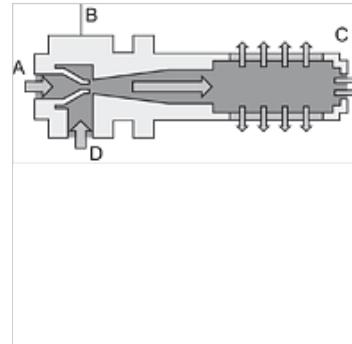

<b>Alkalmazás</b>	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. InConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
-------------------	---

<b>Fúvórendszer</b>	Brass
<b>Csatlakozás</b>	Push-in coupling
<b>Hangcsillapító</b>	Plastic
<b>Alaptest</b>	Impact-resistant plastic

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Cíkk

Megnevezés	Fúvóka méret	Szívószelep nyugalmi állás	Sűrített levegő csatlakozó	Vákuum-csatlakozó	Befoglaló méretek
K-07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K-07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K-07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K-07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

## Tartozék

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit