K-INLINE-EJEKTTOREN VR


Inline ejectors »VR«, screw connection

HANSA FLEX

Tulajdonságok

Tulajdonságok	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Alkalmazás	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
ház	Aluminium eloxed (type VR)
Fúvókarendszer	Brass (type VR)
Csatlakozás	Dugaszoló csatlakozó



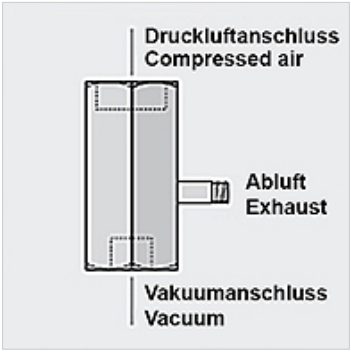

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Cikk

Megnevezés	Fúvóka méret	Távozó levegő csatlakozás	Sűrített levegő csatlakozó	Vákuum-csatlakozó	Kiürítési fok	Levegő-felhasználás szívás (L/min)	max. szívási képesség (L/min)	Hossz (mm)	Üzemi nyomás (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.