
K-HAND-SCHIEBEVENTIL
Manual slide valves

HANSA-FLEX

Tulajdonságok

Üzemi nyomás	max. 10 bar
Üzemi hőmérséklet	max. +70 °C



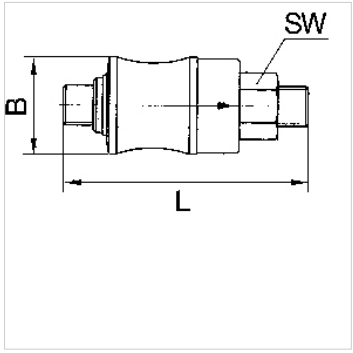

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Cikk

Megnevezés	Menet	B (mm)	L (mm)	SW (mm)
K- 07 30 15 92	G 1/8	21,0	67,0	14
K- 07 30 15 93	G 1/4	24,0	77,0	17
K- 07 30 15 94	G 3/8	31,0	87,0	22
K- 07 30 15 95	G 1/2	35,0	104,0	26

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.