


K-MV G V 230 V, 50 - 60 HZ

Normally closed, pilot-operated, 230 V, 50 to 60 Hz

HANSA FLEX

Tulajdonságok

Elektromos csatlakozás	ISO 4400. cable socket (Pg 11P)
Védettség	IP65 (with connector socket fitted)
Közeghőmérséklet	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Menet leírás	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Ház, szeleptülék	Brass
Belső alkatrészek	Stainless steel
Tömítés	Perbunan (NBR) or FKM

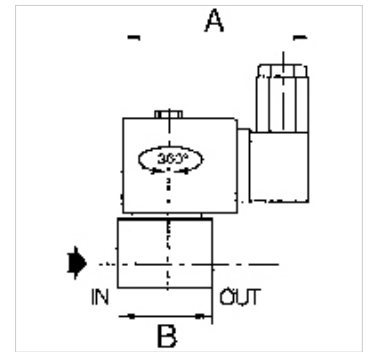

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Cikk

Megnevezés	Menet	max. üzemi nyomás (bar)	min. üzemi nyomás (bar)	NW	Tömítő anyag	A (mm)	B (mm)	Szerkezeti forma
K- 07 30 22 54	Rp 3/8	14	0,35	16,0	NBR	75,0	70,0	3
K- 07 30 22 61	Rp 3/8	14	0,35	16,0	FKM	75,0	70,0	3
K- 07 30 22 55	Rp 1/2	14	0,35	16,0	NBR	75,0	70,0	3
K- 07 30 22 62	Rp 1/2	14	0,35	16,0	FKM	75,0	70,0	3
K- 07 30 22 56	Rp 3/4	9	0,35	19,0	NBR	75,0	71,0	3
K- 07 30 22 63	Rp 3/4	9	0,35	19,0	FKM	75,0	71,0	3
K- 07 30 22 57	Rp 1	9	0,35	25,0	NBR	75,0	95,0	4
K- 07 30 22 64	Rp 1	9	0,35	25,0	FKM	75,0	95,0	4
K- 07 30 22 58	Rp 1 1/4	9	0,35	28,0	NBR	75,0	95,0	4
K- 07 30 22 65	Rp 1 1/4	9	0,35	28,0	FKM	75,0	95,0	4
K- 07 30 22 59	Rp 1 1/2	9	0,35	32,0	NBR	75,0	111,0	5
K- 07 30 22 66	Rp 1 1/2	9	0,35	32,0	FKM	75,0	111,0	5
K- 07 30 22 60	Rp 2	9	0,35	44,0	NBR	75,0	129,0	5