


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Tulajdonságok

| | |
|-------------------------------------|--|
| Bemeneti nyomás | Max. 30 bar |
| Közeghőmérséklet | max. 130 °C |
| Környezeti hőmérséklet | Max. 60 °C |
| Átfolyt mennyiség, tömegáram | 2500 l/min |
| Pórusméret a szűrőelemben | 50 µm |
| Tömítő anyag | FKM |
| Membrán | PTFE on NBR base |
| Anyag | stainless steel 1.4404 (AISI 316L) |
| Drain valve | Manual drain valve |
| Átáramlási érték mérés | At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar |

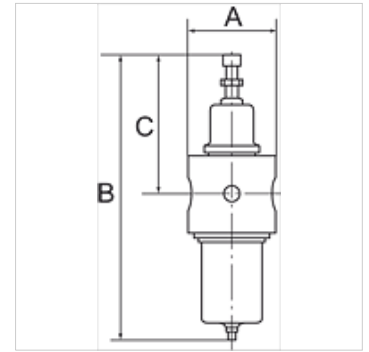

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Rendelési útmutató

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Cikk

| Megnevezés | Menet | Szabályozási tartomány | A (mm) | B | C (mm) |
|----------------|-------|------------------------|-----------|----------|-----------|
| K- 07 25 06 52 | G 1/4 | 1.0 - 15.0 bar | 65,0 | 250,0 mm | 125,0 |
| K- 07 25 06 51 | G 1/2 | 1.0 - 15.0 bar | 80,0 | 260,0 mm | 127,0 |

Pótalkatrészek

| | |
|---------------------------|--|
| K-HALTERBAUSATZ EDELSTAHL | Holder |
| K-MANO | Pressure gauges (CrNi steel type / connection on rear) |
| K-VERSCHLEI-SATZ | Set of wearing parts |