


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Tulajdonságok

Közegek	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Munkanyomás	Max. 10 bar
Kapcsolási nyomás	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Hőmérséklettartomány	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Felépítés	Heads / jacket with self-tapping screws
Dugattyúrúd	C45 steel, hard chrome-plated
Cső	Anodised aluminium jacket with integrated T-slots
Dugattyú	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Tömítő anyag	NBR

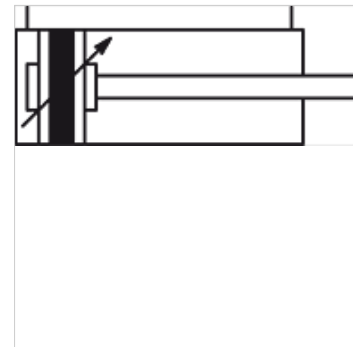

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply. Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides. The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Cikk

Megnevezés	Ø Dugattyú	Löklet (mm)	Csatlakozás	Ø Dugattyúrúd (mm)	Dugattyúrúd-külső menet
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5



Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Cikk	Megnevezés	Ø Dugattyú	Lököt (mm)	Csatlakozás	Ø Dugattyúrúd (mm)	Dugattyúrúd-külső menet
K- 07 15 16 26		50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27		50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28		50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29		63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30		63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31		63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32		63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33		63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34		63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35		63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36		63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37		63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38		63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39		63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40		63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41		63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42		80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43		80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44		80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45		80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46		80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47		80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48		80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49		80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50		80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51		80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52		80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53		80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54		80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64		100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65		100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66		100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67		100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68		100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69		100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70		100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71		100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72		100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73		100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74		100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75		100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76		100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77		125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78		125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79		125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80		125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81		125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82		125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83		125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84		125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85		125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86		125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87		125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88		125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89		125 mm	800	G 1/2"	32	M 27 x 2

Tartozék

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model
K-FRONT ODER BODENFLANSCH	Flange model



Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

