


K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Tulajdonságok

Közeg	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Munkanyomás	Max. 10 bar
Kapcsolási nyomás	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
Hőmérséklettartomány	-10 °C to +80 °C
Felépítés	Screwed joint between stainless steel barrel and heads
Dugattyúrúd	C45 steel, hard chrome-plated
Cső	Anodised aluminium
Dugattyú	Technopolymer
Tömítő anyag	NBR

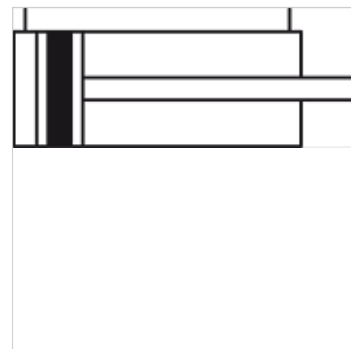

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Version with magnetic piston

Rendelési útmutató

Note: 500 mm is the maximum stroke available for the double-acting type.

További információk

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Cikk

Megnevezés	Ø Dugattyú	Löklet (mm)	Csatlakozás	Dugattyúrúd menete
K- 07 15 17 29	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32	32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33	32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34	32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35	32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36	32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37	32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38	32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39	32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40	40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41	40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42	40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43	40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44	40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45	40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46	40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47	40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48	40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49	40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50	40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51	50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52	50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53	50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54	50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55	50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56	50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57	50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58	50 mm	250	G 1/4	M 16 x 1.5



K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

Cikk

Megnevezés	Ø Dugattyú	Löklet (mm)	Csatlakozás	Dugattyúrúd menete
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

Tartozék

K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMÜTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPFER 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot