
K-FI MIKRO O DIFFERENZ MANO

Micro-filters without differential pressure gauge

Tulajdonságok

Bemeneti nyomás	Min. 4 bar, Max. 16 bar
Nyomáskülönbség-nyomásmérő kijelzési tartomány	0 - 2 bar
Ház, szűrőtartály	Aluminium
Környezeti hőmérséklet	+5 °C to +60 °C
Szűrő finomsága	0,01 µm
Hatásfok	99.9999 %
Szűrőbetét	Borosilicate (with glass-fibre and foam plastic)
Átáramlási érték mérés	At P1 = 6 bar and pressure drop Δp = 1.5%



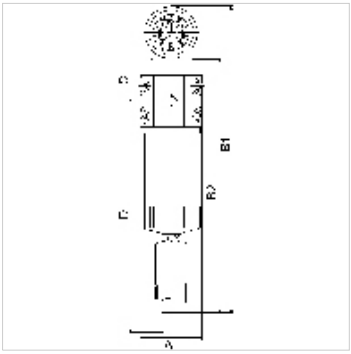

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Suitable for all applications where the standard centrifugal separators do not afford the desired efficiency. The pre-filters and micro-filters are equipped with an automatic drain valve. All devices can be supplied with or without a differential pressure gauge. The differential pressure gauge indicates the degree of contamination of the filter element as a function of the pressure drop.

Cikk

Megnevezés	Menet	Átfolyt mennyiség, tömegáram (L/min)	A (mm)	B2 (mm)	C (mm)	D (mm)
K- 07 25 13 10	G 1/4	1300	82,5	338,0	57,0	353,0
K- 07 25 13 11	G 3/8	1300	82,5	338,0	57,0	353,0
K- 07 25 13 12	G 1/2	1300	82,5	338,0	57,0	353,0
K- 07 25 13 13	G 3/4	2000	82,5	408,0	57,0	493,0
K- 07 25 13 14	G 1	4080	118,0	423,0	72,0	458,0
K- 07 25 13 15	G 1 1/4	4580	118,0	523,0	72,0	658,0
K- 07 25 13 16	G 1 1/2	6500	118,0	623,0	72,0	858,0
K- 07 25 13 17	G 2	9000	118,0	813,0	72,0	1238,0

Pótalkatrészek

K-FILTERELEMENT SONDER	Filter element
K-VERBINDUNGELEMENTE SOND	Connecting sets
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.