



# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

**HANSA FLEX**

## Tulajdonságok

<b>Bemeneti nyomás</b>	2.5 - 16 bar
<b>Kimeneti nyomás</b>	0.5 - 8 bar
<b>Hőmérséklettartomány</b>	-10 °C to +50 °C
<b>Közegek</b>	Sűrített levegő
<b>Tömítő anyag</b>	NBR
<b>Csatlakozómenet</b>	Material: Die-cast zinc
<b>Tartály</b>	Polycarbonate (with bayonet lock) and bowl guard
<b>Szűrőelem</b>	Cellpor (PE) 5 µm
<b>ház</b>	Material: Grivory® (PA 66)
<b>Membrán</b>	NBR
<b>Saját levegőfogyasztás</b>	Max. 1.5 l/min (depending on secondary pressure)
<b>Átáramlási érték mérés</b>	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar
<b>Légtelenítő csatlakozó Golyóscsap</b>	Silencer

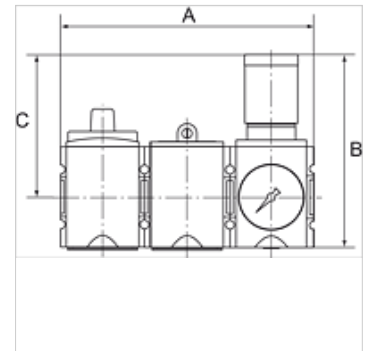

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Rendelési útmutató

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Cikk

Megnevezés	Menet	Szabályozási tartomány	Átfolyt mennyiség, tömegáram (L/min)	A (mm)	B (mm)	C (mm)
K- 07 25 15 20	G 1/4	2.5 - 8 bar	2000	156,0	128,5 mm	95,5
K- 07 25 15 21	G 3/8	2.5 - 8 bar	2000	156,0	128,5 mm	95,5
K- 07 25 15 22	G 3/8	2.5 - 8 bar	4300	189,0	149,5 mm	110,0
K- 07 25 15 23	G 1/2	2.5 - 8 bar	4300	189,0	149,5 mm	110,0
K- 07 25 15 24	G 3/4	2.5 - 8 bar	10000	255,0	191,0 mm	137,0
K- 07 25 15 25	G 1	2.5 - 8 bar	10000	255,0	191,0 mm	137,0

## Tartozék

K-STECKSCHLOSS	Key lock
K-VORHAENGESCHLOSS	Padlock