


# K-PNEU ENTSPRV SCHL SCHL

Pneumatically piloted stop valves, pipe - pipe

**HANSA FLEX**

## Tulajdonságok

|                            |  |
|----------------------------|--|
| Üzemi nyomás               | max. 10 bar  |
| Átfolyás 6,3 bar, p=1 bar  | 400 NI/min (Ø 6), 790 NI/min (Ø 8)   |
| Csatlakozás vezérlő levegő | 4 mm   |
| Hőmérséklettartomány       | -20 °C to +60 °C   |
| Test                       | Technopolymer  |
| Belső alkatrészek          | nickel-plated brass, brass, \ntechnopolymer, stainless steel   |
| Tömítő anyag               | NBR  |
| Szerelés:                  | Wall mounting (housing with drilled holes)<br>Bracket mounting (mounting bracket available)<br>Panel mounting (with bracket or lock nut) |
| Szimbólum                  | on the housing   |

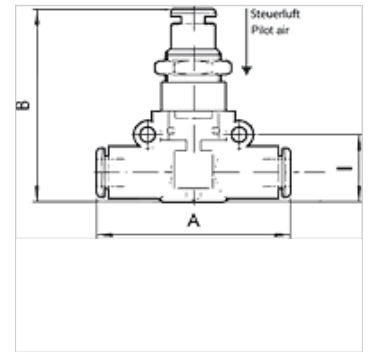

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. <br>All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## Cikk

| Megnevezés     | tömlő Ø-höz (mm) | A (mm) | B (mm) | l (mm) |
|----------------|------------------|--------|--------|--------|
| K- 07 15 25 53 | 6                | 49,4   | 43,2   | 14,6   |
| K- 07 15 25 54 | 8                | 57,3   | 49,7   | 18,7   |