
K-T-VB PP
Union tees

Tulajdonságok

Munkanyomás	on request
Üzemi hőmérséklet	Max. +20 °C
Anyag	Polypropylene (PP)
Tömítő anyag	NBR



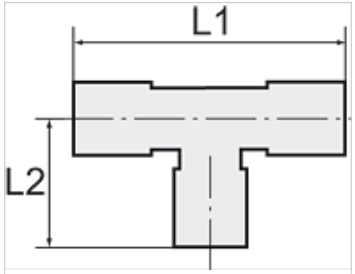

Megjegyzés
További adatokért vegye fel a kapcsolatot.

Leírás
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Cikk

Megnevezés	tömlő külső Ø-höz	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.