


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Tulajdonságok

Bemeneti nyomás	Max. 10 bar
Hőmérséklettartomány	-10 °C to +50 °C
Közegek	Sűrített levegő
Védettség	IP 65
Munkanyomás	0.5 - 8 bar
Nyomáskapcsoló	Changeover contact
Pórusméret a szűrőelemben	20 µm
Átáramlási érték mérés	At 6,3 bar and $\Delta p = 1$ bar

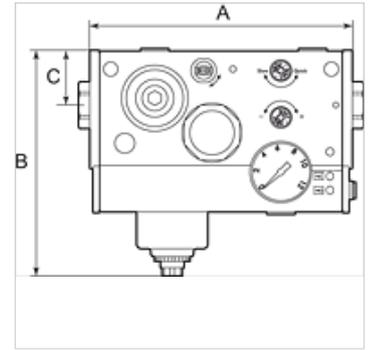

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Rendelési útmutató

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Cikk

Megnevezés	Csatlakozás	Átfolyt mennyiség, tömegáram (L/min)	A (mm)	B	C (mm)	Feszültség
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)