

# K-RD STUECKE PP

Reducers

**HANSA FLEX**


## Tulajdonságok

Munkanyomás on request

Üzemi hőmérséklet Max. +20 °C

Anyag Polypropylene (PP)

Tömítő anyag NBR

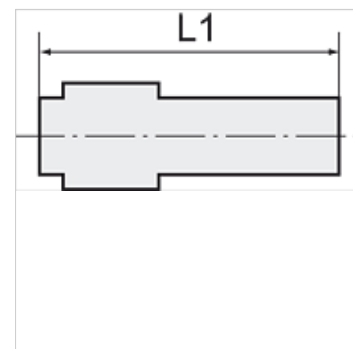

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Cikk

| Megnevezés     | tömlő külső Ø-höz | L1<br>(mm) | Csonkok<br>(mm) |
|----------------|-------------------|------------|-----------------|
| K- 07 40 29 00 | 22 mm             | 127,0      | 32              |
| K- 07 40 29 01 | 28 mm             | 133,3      | 32              |