
K-RD STUECKE PP

Reducers

Tulajdonságok

Munkanyomás	on request
Üzemi hőmérséklet	Max. +20 °C
Anyag	Polypropylene (PP)
Tömítő anyag	NBR



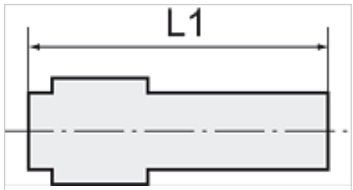

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Cikk

Megnevezés	tömlő külső Ø-höz	L1 (mm)	Csonkok (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.