

# K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

**HANSA FLEX**


## Tulajdonságok

Munkanyomás on request

Üzemi hőmérséklet Max. +20 °C

Anyag Polypropylene (PP)

Tömítő anyag NBR

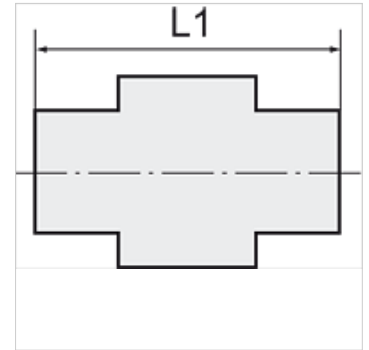

## Megjegyzés

További adatokért vegye fel a kapcsolatot.

## Leírás

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Cikk

Megnevezés	Menet	tömlő külső Ø-höz	L1 (mm)	SW (Kulcsnyílás)
K- 07 40 28 39	G 1	32 mm	111,4	46 mm
K- 07 40 28 40	G 1 1/2	32 mm	109,2	49 mm