

K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX


Tulajdonságok

Munkanyomás on request

Üzemi hőmérséklet Max. +20 °C

Anyag Polypropylene (PP)

Tömítő anyag NBR

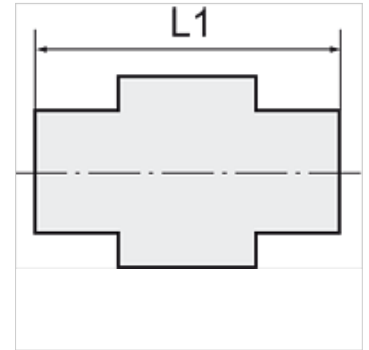

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Cikk

| Megnevezés | Menet | tömlő külső Ø-höz | L1 (mm) | SW (Kulcsnyílás) |
|----------------|---------|-------------------|------------|------------------|
| K- 07 40 28 39 | G 1 | 32 mm | 111,4 | 46 mm |
| K- 07 40 28 40 | G 1 1/2 | 32 mm | 109,2 | 49 mm |