



K-STECKNIPPEL

push-in plug

HANSA FLEX

Tulajdonságok

| | |
|-------------------|-----------------------|
| Munkanyomás | Max. 16 bar |
| Üzemi hőmérséklet | -20 °C to +80 °C |
| Anyag | Sárgaréz, nikkelezett |

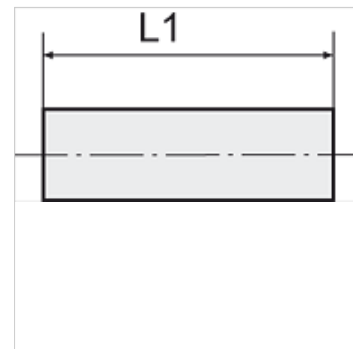

Megjegyzés

További adatokért vegye fel a kapcsolatot.

Leírás

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Cikk

| Megnevezés | tömlő külső Ø-höz | L1 (mm) |
|----------------|-------------------|------------|
| K- 07 40 47 53 | 4 mm | 34,0 |
| K- 07 40 47 54 | 5 mm | 34,0 |
| K- 07 40 47 55 | 6 mm | 37,5 |
| K- 07 40 47 56 | 8 mm | 37,5 |
| K- 07 40 47 57 | 10 mm | 45,0 |
| K- 07 40 47 58 | 12 mm | 48,0 |
| K- 07 40 47 59 | 14 mm | 58,0 |