


# DHS M / DHS R

Vita cava doppia

**HANSA FLEX**

## Caratteristiche

|                         |                                |
|-------------------------|--------------------------------|
| Attacco 1               | Filetto esterno BSP / metrico  |
| Tipo                    | Vita cava doppia               |
| Norma                   | DIN 7643                       |
| Materiale               | Acciaio                        |
| Protezione superficiale | con rivestimento elettrolitico |

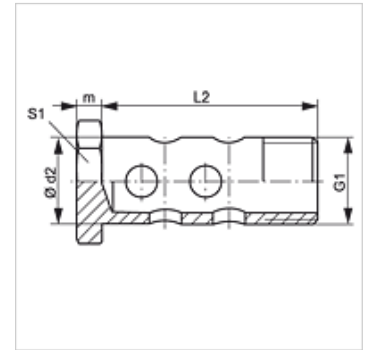

## Articolo

| Denominazione | G1         | Ø d2<br>(mm) | L2<br>(mm) | m<br>(mm) | S1 |
|---------------|------------|--------------|------------|-----------|----|
| DHS M 06      | M 6 x 1    | 6            | 25         | 5         | 11 |
| DHS M 08      | M 8 x 1    | 8            | 27         | 5         | 12 |
| DHS M 10      | M 10 x 1   | 10           | 30         | 6         | 14 |
| DHS M 12      | M 12 x 1,5 | 12           | 38         | 6         | 17 |
| DHS M 14      | M 14 x 1,5 | 14           | 42         | 6         | 19 |
| DHS M 16      | M 16 x 1,5 | 16           | 46         | 6         | 22 |
| DHS M 18      | M 18 x 1,5 | 18           | 54         | 6         | 24 |
| DHS M 22      | M 22 x 1,5 | 22           | 69         | 7         | 27 |
| DHS M 26      | M 26 x 1,5 | 26           | 77         | 8         | 32 |
| DHS M 30      | M 30 x 1,5 | 30           | 86         | 8         | 36 |
| DHS R 1/4     | G 1/4" -19 | 13           | 41         | 6         | 19 |

SW, S1, S2 = apertura chiave