

# VSSK IR VA

Dado di chiusura

**HANSA FLEX**



## Caratteristiche

**Attacco 1** Filetto interno BSP cilindrico

**Tenuta 1** con guarnizione piana

**Tipo** Dado di chiusura

**Materiale** Acciaio inossidabile

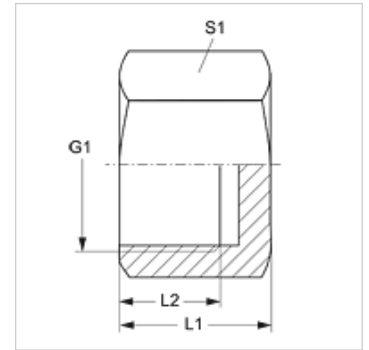

## Articolo

| Denominazione | G1           | L1<br>(mm) | L2<br>(mm) | S1 |
|---------------|--------------|------------|------------|----|
| VSSK IR 02 VA | G 1/8" -28   | 15,0       | 10,0       | 14 |
| VSSK IR 04 VA | G 1/4" -19   | 18,0       | 12,5       | 17 |
| VSSK IR 06 VA | G 3/8" -19   | 19,0       | 13,0       | 22 |
| VSSK IR 08 VA | G 1/2" -14   | 21,0       | 14,5       | 27 |
| VSSK IR 12 VA | G 3/4" -14   | 24,5       | 18,5       | 32 |
| VSSK IR 16 VA | G 1" -11     | 25,0       | 19,0       | 41 |
| VSSK IR 20 VA | G 1.1/4" -11 | 29,0       | 22,0       | 50 |
| VSSK IR 24 VA | G 1.1/2" -11 | 31,0       | 23,5       | 55 |
| VSSK IR 32 VA | G 2" -11     | 32,0       | 24,5       | 70 |

SW, S1, S2 = apertura chiave