


# PHY 300

Boccola a pressione, NY 300

**HANSA FLEX**

## Caratteristiche

|                                |                                |
|--------------------------------|--------------------------------|
| <b>Tipo di sede</b>            | Attacco femmina                |
| <b>Materiale</b>               | Acciaio                        |
| <b>Protezione superficiale</b> | con rivestimento elettrolitico |

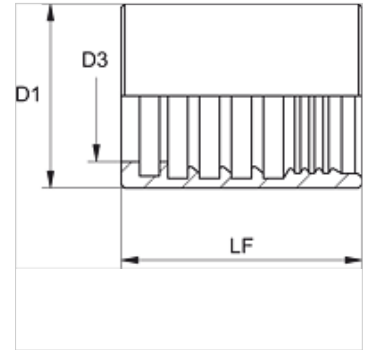

## Articolo

| Denominazione | DN* | Size | pollice | D1<br>(mm) | D3<br>(mm) | LF<br>(mm) |
|---------------|-----|------|---------|------------|------------|------------|
| PHY 306       | 6   | 4    | 1/4"    | 18,0       | 11,3       | 43,0       |
| PHY 308       | 8   | 5    | 5/16"   | 20,0       | 11,3       | 40,0       |
| PHY 310       | 10  | 6    | 3/8"    | 23,0       | 13,7       | 47,0       |
| PHY 313       | 12  | 8    | 1/2"    | 29,0       | 16,6       | 50,0       |
| PHY 316       | 16  | 10   | 5/8"    | 32,0       | 19,9       | 60,0       |
| PHY 320       | 19  | 12   | 3/4"    | 37,0       | 24,5       | 60,0       |
| PHY 325       | 25  | 16   | 1"      | 42,0       | 29,5       | 60,0       |

DN = diametro nominale, larghezza nominale