



# PSGB 100

Boccola a pressare, SGB 100

**HANSA FLEX**

## Caratteristiche

<b>Tipo di sede</b>	Attacco femmina
<b>Materiale</b>	Acciaio
<b>Protezione superficiale</b>	con rivestimento elettrolitico

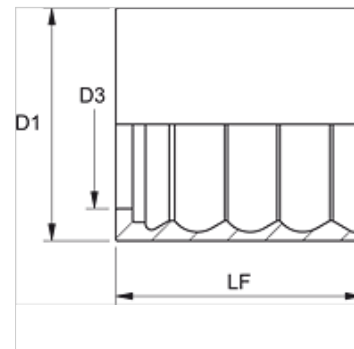

## Articolo

Denominazione	DN*	Size	pollice	D1 (mm)	D3 (mm)	LF (mm)
<b>PSGB 120</b>	19	12	3/4"	39,5	25,0	35,0
<b>PSGB 125</b>	25	16	1"	46,0	32,7	44,0
<b>PSGB 132</b>	31	20	1.1/4"	55,0	39,8	58,5
<b>PSGB 140</b>	38	24	1.1/2"	65,0	45,8	63,0
<b>PSGB 150</b>	51	32	2"	75,0	59,8	78,0
<b>PSGB 160</b>	60	40	2.3/8"	85,0	67,1	79,0

DN = diametro nominale, larghezza nominale