


# SF O-RING V

O-ring, 75SH FKM (FPM)

## Caratteristiche

|                  |                     |
|------------------|---------------------|
| Tipo             | Forma rettangolare  |
| Temperatura min. | -15 °C              |
| Temperatura max. | 200 °C              |
| Materiale        | FKM SH 90 ( Viton ) |

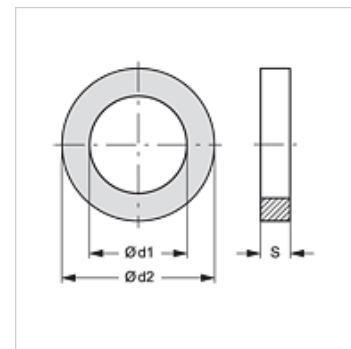

## Articolo

| Denominazione | DN* | Size | pollice | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
|---------------|-----|------|---------|--------------|--------------|-----------|
| SF ORING 13 V | 12  | 8    | 1/2"    | 18,66        | 25,72        | 3,53      |
| SF ORING 20 V | 19  | 12   | 3/4"    | 24,99        | 32,05        | 3,53      |
| SF ORING 25 V | 25  | 16   | 1"      | 32,92        | 39,98        | 3,53      |
| SF ORING 32 V | 31  | 20   | 1.1/4"  | 37,70        | 44,76        | 3,53      |
| SF ORING 40 V | 38  | 24   | 1.1/2"  | 47,22        | 54,28        | 3,53      |
| SF ORING 50 V | 51  | 32   | 2"      | 56,74        | 63,80        | 3,53      |
| SF ORING 60 V | 60  | 40   | 2.1/2"  | 69,45        | 76,51        | 3,53      |
| SF ORING 75 V | 76  | 48   | 3"      | 85,32        | 92,38        | 3,53      |

## Varianti dei prodotti

SF O-RING PU