


KML M DISA EP

Tenuta per raccordo femmina Camlock EPDM

HANSA**FLEX**

Caratteristiche

Materiale EPDM (gomma etilene propilene)

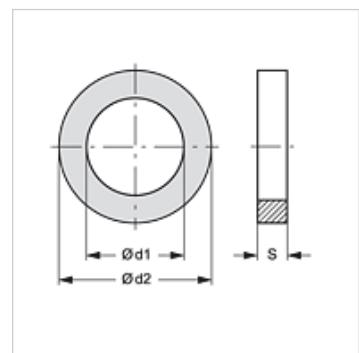

Articolo

| Denominazione | per grandezza del giunto: | Ø d1 (mm) | Ø d2 (mm) | S (mm) |
|---------------------|---------------------------|--------------|--------------|-----------|
| KML M DISA 3/4 EP | 3/4" | 22,22 | 34,93 | 5,54 |
| KML M DISA 1 EP | 1" | 26,99 | 39,69 | 6,35 |
| KML M DISA 1.1/4 EP | 1.1/4" | 34,53 | 49,21 | 6,35 |
| KML M DISA 1.1/2 EP | 1.1/2" | 41,27 | 55,56 | 6,35 |
| KML M DISA 2 EP | 2" | 50,80 | 66,67 | 6,35 |
| KML M DISA 2.1/2 EP | 2.1/2" | 60,32 | 79,37 | 6,35 |
| KML M DISA 3 EP | 3" | 76,20 | 94,45 | 6,35 |
| KML M DISA 4 EP | 4" | 101,60 | 123,82 | 6,35 |

Varianti dei prodotti

KML M DISA NBR Tenuta per raccordo femmina Camlock NBR, NBR

KML M DISA SIL Tenuta per raccordo femmina Camlock, Silicone

KML M DISA V Tenuta per raccordo femmina Camlock FKM (FPM), FKM SH 90 (Viton)