

# HK CTBF


Pistoni filettati corti per cilindri idraulici

**HANSA FLEX**

## Caratteristiche

**Materiale** Acciaio 9SMn28

**Utilizzo** Suitable for cylinder HK HFR 2S

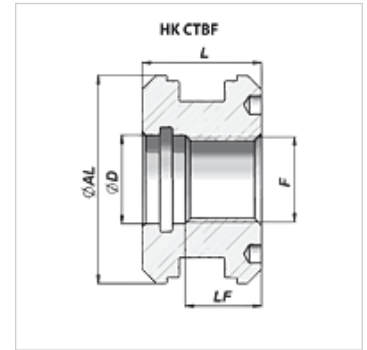

## Nota

Set di guarnizioni adatte disponibili su richiesta.

## Articolo

| Denominazione   | Ø AL<br>(mm) | Ø D<br>(mm) | F        | L<br>(mm) | LF<br>(mm) | Peso<br>(kg) |
|-----------------|--------------|-------------|----------|-----------|------------|--------------|
| HK CTBF 040 M16 | 40           | 17,0        | M 16x1,5 | 27        | 19         | 0,17         |
| HK CTBF 050 M20 | 50           | 21,0        | M 20x1,5 | 30        | 21         | 0,29         |
| HK CTBF 060 M24 | 60           | 25,1        | M 24x2   | 35        | 24         | 0,45         |
| HK CTBF 063 M24 | 63           | 25,0        | M 24x2   | 35        | 23         | 0,50         |
| HK CTBF 070 M24 | 70           | 25,1        | M 24x2   | 35        | 24         | 0,70         |
| HK CTBF 080 M27 | 80           | 28,1        | M 27x2   | 40        | 26         | 1,10         |
| HK CTBF 100 M33 | 100          | 35,1        | M 33x2   | 40        | 26         | 1,80         |