



HK GEH 20 GGG

Sede valvola per valvola avvitabile SAE a 2 vie in GGG40

HANSA FLEX

Caratteristiche

Materiale	GGG 40
Pressione d'esercizio	max. 350 bar
Protezione superficiale	zincato

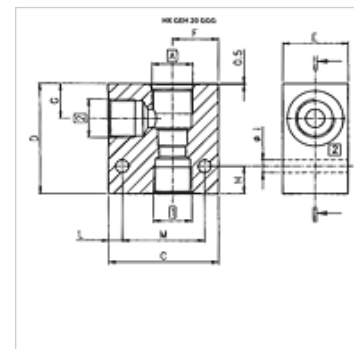

Articolo

Denominazione	Foro valvola A	Attacco 1,3 C	D	E	F	G	H	I	L	M	Peso (kg)
HK GEH 38 C0820 GGG	C0820 UNF 3/4" -16	G 3/8" 50	50	29	20	13,5	12	6	9,0	35	0,4
HK GEH 38 C1020 GGG	C1020 UNF 7/8" -14	G 3/8" 60	60	40	24	19,0	15	7	7,5	45	0,8
HK GEH 34 C1020 GGG	C1020 UNF 7/8" -14	G 3/4" 60	60	44	24	21,5	15	7	7,5	45	1,7
HK GEH 12 C1220 GGG	C1220 UNF 1.1/16" -12	G 1/2" 80	80	50	34	26,0	18	9	10,0	60	0,9
HK GEH 34 C1220 GGG	C1220 UNF 1.1/16" -12	G 3/4" 80	80	50	34	26,0	18	9	10,0	60	1,7

È un accessorio dei seguenti prodotti

HK EMDV	Valvola magnetica a 2/2 vie EMDV
HK RVPS	Valvola limitatrice della pressione RVPS
HK PCFC	Valvola regolatrice del flusso a 2 vie PCFC