


# K-ELEKTRO-KABELAUFROLL POM

Electrical cable reels (POM) easy mounting on the wall or ceiling

**HANSA FLEX**

## Caratteristiche

|                              |  |
|------------------------------|--|
| <b>Cavo</b>                  | PVC 3 x 1.5 mm <sup>2</sup>                            |
| <b>Intensità di corrente</b> | Max. 16 A  |
| <b>Attacco</b>               | SchuKo plug  |
| <b>Potenza assorbita</b>     | Max. 1000 W (fully wound), max. 3500 W (fully unwound) |

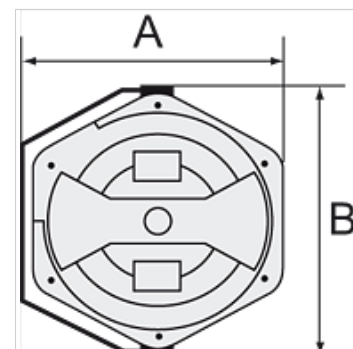

## Nota

Altri dati su richiesta.

## Descrizione

Closed, rugged, impact-resistant housing made of POM. Includes a thermal circuit breaker. In case of overloading, a thermal overload protective circuit cuts off the electrical power supply automatically.

## Articolo

| Denominazione  | A<br>(mm) | B<br>(mm) | Lunghezza<br>(m) | Tensione  |
|----------------|-----------|-----------|------------------|-----------|
| K- 07 10 03 46 | 394,5     | 436,0     | 10               | max. 230V |
| K- 07 10 03 47 | 394,5     | 436,0     | 17               | max. 230V |