
K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

Caratteristiche

Materiale del tubo flessibile	Braided polyurethane
Pressione d'esercizio	max. 12 bar
Temperatura d'esercizio	-20 °C to +60 °C
Angolo di rotazione	300°



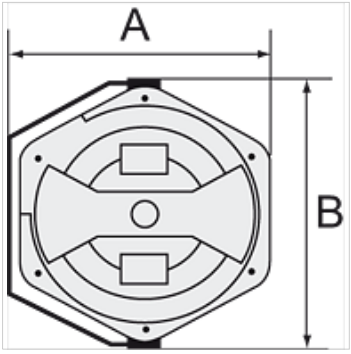

Nota

Altri dati su richiesta.

Descrizione

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

Articolo

Denominazione	Dimensione tubo flessibile	A (mm)	B (mm)	Lunghezza tubo flessibile (m)
K- 07 10 06 14	16 mm x 11 mm	394,5	436,0	10

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.