


K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

HANSA FLEX

Caratteristiche

| | |
|-------------------------------|----------------------|
| Materiale del tubo flessibile | Braided polyurethane |
| Pressione d'esercizio | max. 12 bar |
| Temperatura d'esercizio | -20 °C to +60 °C |
| Angolo di rotazione | 300° |

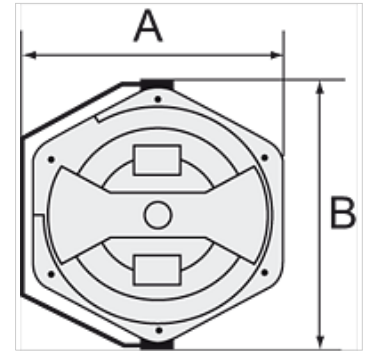

Nota

Altri dati su richiesta.

Descrizione

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

Articolo

| Denominazione | Dimensione tubo flessibile | A (mm) | B (mm) | Lunghezza tubo flessibile (m) |
|----------------|----------------------------|-----------|-----------|----------------------------------|
| K- 07 10 06 14 | 16 mm x 11 mm | 394,5 | 436,0 | 10 |