
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Caratteristiche

Pressione d'esercizio	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
Giunto di accoppiamento	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
Tubo flessibile a spirale	Polyurethane

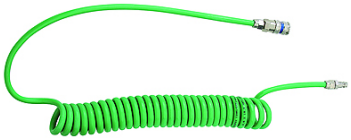

Nota

Altri dati su richiesta.

Descrizione

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Articolo

Denominazione	Dimensione tubo flessibile	Ø spirale (mm)	Lunghezza di lavoro (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.