

K-GRUNDEJEKTION SBP

Basic ejectors

HANSA FLEX

Caratteristiche

Caratteristiche Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%)
No moving parts, which means no wear and no maintenance
Maximum suction capacity with minimum compressed air consumption
Minimum size, low weight
For decentralised vacuum generation in highly dynamic processes

Applicazione For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries.
Also ideal for the construction of ejector blocks for decentralised control of suction pads.


Alloggiamento Plastic (impact-resistant)

Attacco Push-in coupling

Pressione d'esercizio 4.5 bar

Grado di evacuazione 85 %

Silenziatore Plastic

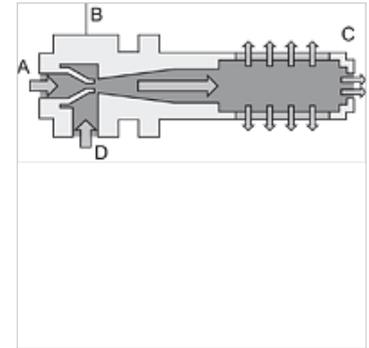

Nota

Altri dati su richiesta.

Descrizione

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Articolo

Denominazione	Dimensione ugello	Attacco aria compressa	Attacco per vuoto	Consumo d'aria aspirazione (L/min)	capacità di aspirazione max. (L/min)	Misura
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Accessori

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers