
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Caratteristiche

Caratteristiche	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Applicazione	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Alloggiamento	Aluminium eloxed (type VR)
Sistema ugello	Brass (type VR)
Attacco	Attacco ad innesto



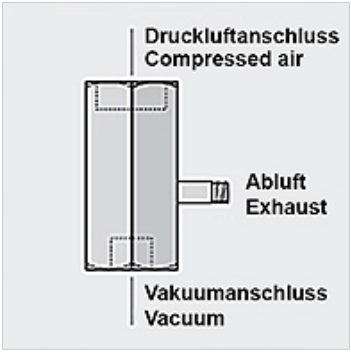

Nota

Altri dati su richiesta.

Descrizione

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Articolo

Denominazione	Dimensione ugello	Attacco aria di scarico	Attacco aria compressa	Attacco per vuoto	Grado di evacuazione	Consumo d'aria aspirazione (L/min)	capacità di aspirazione max. (L/min)	Lungh-ezza (mm)	Pressione d'esercizio (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.