


# K-ABSPV ECK

## Angle-type globe valves

HANSA FLEX

### Caratteristiche

Pressione d'esercizio	Max. 40 bar
Filettatura descrizione	With inside cone for ball-type hose fitting
Alloggiamento	Brass
Volantino	Plastic
Mandrino	With stainless steel ball

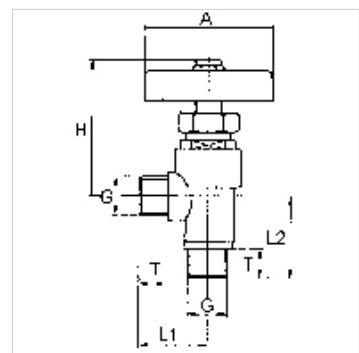

### Nota

Altri dati su richiesta.

### Articolo

Denominazione	DN	Filetto	A (mm)	H (mm)	L1 (mm)	L2 (mm)	SW (mm)	T (mm)
K-07 30 12 49	6	G 1/4	48,0	45,0	25,0	27,0	19	11,0
K-07 30 12 50	8	G 3/8	48,0	45,0	25,0	27,0	19	11,0