



K-BKR ECKFORM IG AG AUS

Ball valves, angle type, female/male thread (male thread on side)

HANSA FLEX

Caratteristiche

Campo di impiego	Gas, compressed air, water, oil, weak alkaline solutions
Pressione d'esercizio	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
Temperatura d'esercizio	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
Filettatura descrizione	R or Rp thread acc. to ISO 7-1
Alloggiamento, parti interne	Nickel-plated brass
Leva	Aluminium, painted yellow
Guarnizione sfera	PTFE
Guarnizione mandrino	NBR

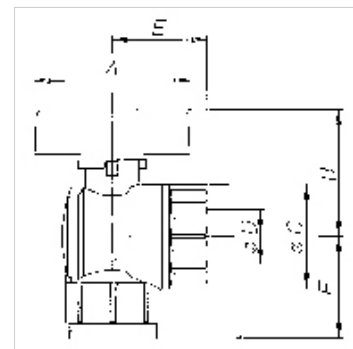

Nota

Altri dati su richiesta.

Articolo

Denominazione	DN	Filetto	PN (bar)	A (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 27	15	R/Rp 1/2	40	47,0	37,0	31,0	37,0	33,0
K- 07 30 20 28	20	R/Rp 3/4	40	56,0	46,0	38,9	43,0	38,0
K- 07 30 20 29	25	R/Rp 1	40	56,0	50,0	48,0	51,0	46,0