



K-BKR MINI SERIE VALVE LINE

Mini ball valves

HANSA FLEX

Caratteristiche

| | |
|------------------------|---------------------|
| Pressione d'esercizio | max. 10 bar |
| Temperatura del fluido | -10 °C to +90 °C |
| Manopola | Plastic |
| Alloggiamento e sfera | Nickel-plated brass |
| Guarnizione sfera | PTFE |
| Guarnizione mandrino | NBR |

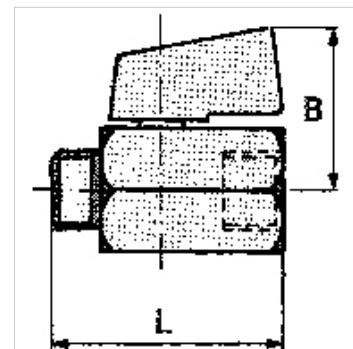

Articolo

| Denominazione | DN | Filetto | B (mm) | L (mm) | SW (mm) |
|----------------|----|-----------------|-----------|-----------|------------|
| K- 07 30 21 69 | 8 | 1/4 female | 28,0 | 42,0 | 20 |
| K- 07 30 21 70 | 8 | 3/8 female | 28,0 | 42,0 | 20 |
| K- 07 30 21 71 | 10 | 1/2 female | 29,0 | 45,5 | 24 |
| K- 07 30 21 72 | 8 | 1/4 female/male | 28,0 | 40,5 | 20 |
| K- 07 30 21 73 | 8 | 3/8 female/male | 28,0 | 40,5 | 20 |
| K- 07 30 21 74 | 10 | 1/2 female/male | 29,0 | 44,5 | 24 |