


# K-MV G D 230 V, 50 - 60 HZ

Normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Caratteristiche

|                                    |  |
|------------------------------------|--|
| <b>Collegamento elettrico</b>      | ISO 4400. cable socket (Pg 11P)                              |
| <b>Grado di protezione</b>         | IP65 (with connector socket fitted)                          |
| <b>Temperatura del fluido</b>      | max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal   |
| <b>Filettatura descrizione</b>     | G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1 |
| <b>Alloggiamento, sede valvola</b> | Brass  |
| <b>Parti interne</b>               | Stainless steel  |
| <b>Guarnizione</b>                 | Perbunan (NBR) or FKM  |

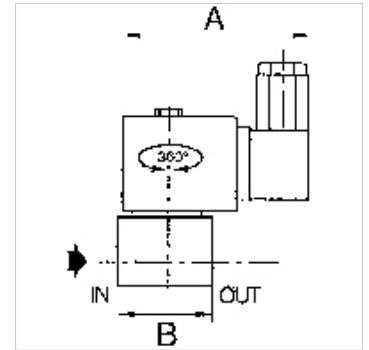

## Nota

Altri dati su richiesta.

## Descrizione

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Articolo

| Denominazione  | Filetto | pressione d'esercizio max.<br>(bar) | NW  | Materiale di tenuta | A<br>(mm) | B<br>(mm) | Forma costruttiva |
|----------------|---------|-------------------------------------|-----|---------------------|-----------|-----------|-------------------|
| K- 07 30 22 35 | G 1/8   | 12                                  | 3,2 | NBR                 | 75,0      | 30,0      | 1                 |
| K- 07 30 22 37 | G 1/8   | 12                                  | 3,2 | FKM                 | 75,0      | 30,0      | 1                 |
| K- 07 30 22 36 | G 1/4   | 11                                  | 3,2 | NBR                 | 75,0      | 40,0      | 2                 |
| K- 07 30 22 38 | G 1/4   | 11                                  | 3,2 | FKM                 | 75,0      | 40,0      | 2                 |