


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

Caratteristiche

Collegamento elettrico	ISO 4400. cable socket (Pg 11P)
Grado di protezione	IP65 (with connector socket fitted)
Temperatura del fluido	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Filettatura descrizione	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Alloggiamento, sede valvola	Brass
Parti interne	Stainless steel
Guarnizione	Perbunan (NBR) or FKM

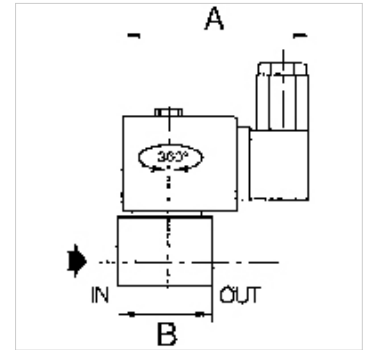

Nota

Altri dati su richiesta.

Descrizione

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Articolo

Denominazione	Filetto	pressione d'esercizio max. (bar)	NW	Materiale di tenuta	A (mm)	B (mm)	Forma costruttiva
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3