


# K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Caratteristiche

<b>Collegamento elettrico</b>	ISO 4400. cable socket (Pg 11P)
<b>Grado di protezione</b>	IP65 (with connector socket fitted)
<b>Temperatura del fluido</b>	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
<b>Filettatura descrizione</b>	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
<b>Alloggiamento, sede valvola</b>	Brass
<b>Parti interne</b>	Stainless steel
<b>Guarnizione</b>	Perbunan (NBR) or FKM

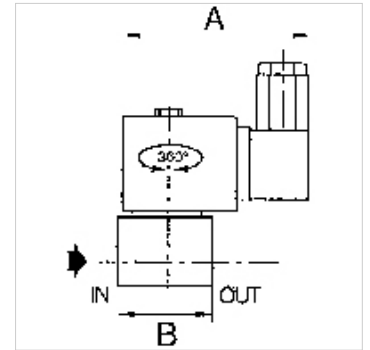

## Nota

Altri dati su richiesta.

## Descrizione

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Articolo

Denominazione	Filetto	pressione d'esercizio max. (bar)	NW	Materiale di tenuta	A (mm)	B (mm)	Forma costruttiva
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2