


K-MV O Z 24 V DC

Normally open, combined operation, 24 V DC (direct current)

HANSA FLEX

Caratteristiche

Collegamento elettrico	ISO 4400. cable socket (Pg 11P)
Grado di protezione	IP65 (with connector socket fitted)
Temperatura del fluido	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Filettatura descrizione	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Alloggiamento, sede valvola	Brass
Parti interne	Stainless steel
Guarnizione	Perbunan (NBR) or FKM

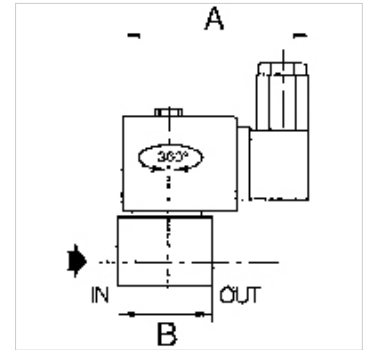

Nota

Altri dati su richiesta.

Descrizione

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Articolo

Denominazione	Filetto	pressione d'esercizio max. (bar)	NW	Materiale di tenuta	A (mm)	B (mm)	Forma costruttiva
K- 07 30 24 00	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 24 01	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 24 02	Rp 3/4	9	19,0	NBR	80,0	70,0	3