


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Caratteristiche

|                                      |   |
|--------------------------------------|---|
| <b>Pressione differenziale</b>       | 0 - 16 bar  |
| <b>Temperatura del fluido</b>        | -10 °C to +180 °C   |
| <b>Attacco aria comando</b>          | G 1/8   |
| <b>Temperatura fluido di comando</b> | max. +60 °C   |
| <b>Temperatura ambiente</b>          | -20 °C to +70 °C  |
| <b>pressione statica ammessa</b>     | Max. 16 bar   |
| <b>Sede valvola</b>                  | Bronze  |
| <b>Connettore</b>                    | Stainless steel   |
| <b>Testa di comando</b>              | Polyamide (glass fibre-reinforced)                                  |
| <b>Pistone</b>                       | Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50) |
| <b>Mandrino</b>                      | Stainless steel   |
| <b>Materiale di tenuta</b>           | PTFE  |

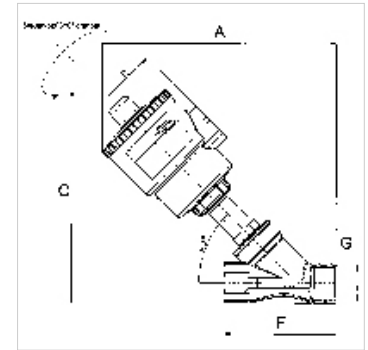

## Nota

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Altri dati su richiesta.

## Descrizione

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Informazioni supplementari

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Articolo

| Denominazione  | A     | C     | F     | Filetto | differenza di pressione d'esercizio max. | pressione di comando min. | pressione di comando max. |
|----------------|-------|-------|-------|---------|--|---------------------------|---------------------------|
|                | (mm)  | (mm)  | (mm)  |         | (bar)                                    |                           |                           |
| K- 07 30 25 24 | 163,0 | 153,0 | 65,0  | G 1/2   | 16                                       | 4                         | 10                        |
| K- 07 30 25 25 | 173,0 | 163,0 | 75,0  | G 3/4   | 10                                       | 4                         | 10                        |
| K- 07 30 25 26 | 191,0 | 181,0 | 75,0  | G 3/4   | 16                                       | 4                         | 10                        |
| K- 07 30 25 27 | 206,0 | 196,0 | 90,0  | G 1     | 11                                       | 4                         | 10                        |
| K- 07 30 25 28 | 246,0 | 236,0 | 90,0  | G 1     | 16                                       | 4                         | 8                         |
| K- 07 30 25 29 | 255,0 | 245,0 | 110,0 | G 1 1/4 | 14                                       | 4                         | 8                         |
| K- 07 30 25 30 | 270,0 | 264,0 | 120,0 | G 1 1/2 | 11                                       | 4                         | 8                         |
| K- 07 30 25 31 | 306,0 | 300,0 | 120,0 | G 1 1/2 | 16                                       | 4                         | 8                         |
| K- 07 30 25 32 | 316,0 | 311,0 | 150,0 | G 2     | 10                                       | 4                         | 8                         |